


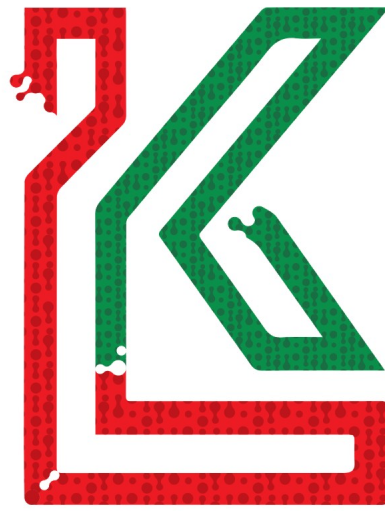

LAHKIRI & KAMOUCHE
HARDWARE FURNITURE & ACCESSORIES

HINGES · SLIDES · GAS SPRINGS

PRODUCT CATALOGUE

铰链 · 滑轨 · 气动支撑 产品目录




SARL : LAHKIRI & KAMOUCHE

+974 50 24 76 63
+213 654 76 80 42
+39 347 731 70 71
+213 553 31 76 18

contact@lk-hardware.com
www.lk-hardware.com



WhatsApp



WeChat

COMPANY PROFILE Lahkiri & Kamouche

LAHKIRI & KAMOUCHE — Hardware, Furniture & Accessories. Engaged in the development, production and sales of household hardware products for nearly **20 years.**



We specialize in the production and sale of kitchen storage solutions, including baskets, storage shelves, pantry units, magic corners, and a wide range of furniture accessories such as hinges and slide rails.

Our mission has always been to provide customers with cost-effective, high-quality home hardware accessories.

Guided by the philosophy of “quality first, customer first, mutual benefit, and win-win cooperation”, we continuously strive to expand our market presence while enhancing the professionalism and overall competitiveness of our enterprise. Our goal is to deliver the most professional services, superior products, competitive prices, and prompt after-sales support.

We sincerely look forward to growing and achieving success together with you.

20+

YEARS OF INDUSTRY
EXPERIENCE

15+

MANUFACTURING
CUSTOM
EXPERIENCE

R&D

PROFESSIONAL R&D
DEPARTMENT

OEM/ODM

CUSTOMIZED
SERVICE

IN THIS CATALOGUE



HINGE SERIES

Hydraulic, 3D, aluminium frame, short arm, special angle, 26 / 40 mm cup



SLIDE SERIES

Ball bearing, soft close, undermount, heavy duty, tandem box



GAS SPRING

Lift supports 50N – 250N for wooden and aluminium frame doors

CONTENTS 目录

01

Hinge Adjustment

铰链调节
05-06

03

Slide Series

滑轨系列
18-30

Company Profile

公司简介
02

02

Hinge Series

铰链系列
07-16

04

Gas Spring

气动支撑系列
32-35

PRODUCT INDEX

Hinge Adjustment 铰链调节	05	45mm Iron Ball Bearing Slide 45mm宽铁走珠滑轨	20
Hinge Adjustment Parameters 铰链调节参数	06	45mm Iron Soft Close Slide 45mm宽缓冲滑轨	21
35mm Cup SS Hydraulic Hinge 不锈钢可泡水系列	07	Stainless Steel Ball Bearing Slide 不锈钢普通滑轨	22
35mm Cup 3D Hydraulic Hinge 三维调节铰链系列	08	45mm Stainless Steel Soft Close Slide 45mm不锈钢缓冲滑轨	23
Aluminum Frame Hinge 铝框铰链系列	09	3-Fold Soft Close Undermount Slide 三节缓冲隐藏轨	24
American Short Arm Hinge 美式短臂系列	10	FGV 2-Fold Ball Powder Slide FGV两节喷粉滚轮滑轨	25
35mm Cup Hinge With Hook 35杯铰链带钩系列	11	2-Fold Soft Close Undermount Slide 二节缓冲隐藏轨	26
Special Angle Hinge 特殊角度铰链	12	Bidirectional Ball Slide 双向走珠滑轨	27
Special Angle Aluminum Frame Hinge 特殊角度铝框铰链	13	53/76mm Heavy Duty Soft Close Slide 重型缓冲滑轨	28
35mm Cup Normal Iron Hinge 常规铁铰链	14	2-Fold Soft Close Slim Tandem Box 二节缓冲超薄骑马抽	29
26mm Cup Normal Hinge 26杯普通铰链	15	3-Fold Soft Close Slim Tandem Box 三节缓冲超薄骑马抽	30
40mm Cup Hydraulic Hinge 40杯液压铰链系列	16	Gas Spring — Technical Data 技术参数	32
35mm Iron Ball Bearing Slide 35mm宽铁走珠滑轨	18	Gas Spring GC-01 – GC-06 气动支撑系列	33-35
40mm Iron Ball Bearing Slide 40mm宽铁走珠滑轨	19		



01

HINGE SERIES

铰链系列




Hinge Adjustment	05
Adjustment Parameters	06
Hydraulic & 3D Hinges	07-08
Aluminum Frame Hinges	09
American Short Arm Hinges	10
Hinges With Hook	11
Special Angle Hinges	12-13
Normal Iron / 26mm / 40mm Cup	14-16

HINGE ADJUSTMENT 铰链调节

RIGHT / LEFT ADJUSTMENT OF DOOR 铰链门的左右调校


铰链门的左右调校

±5 mm



一种特别发展的技术办法使门身可左右调校达5毫米，同时可利用铰链臂上的安装锁装置，重新掩盖门身后的夹缝（L初始值为0.7毫米）。


With a specially developed technical solution, it is possible to make a right/left door adjustment of up to 5 mm. With the fitting lock device on the hinge arm, the gap behind the door can also be covered (original value L is 0.5 mm).

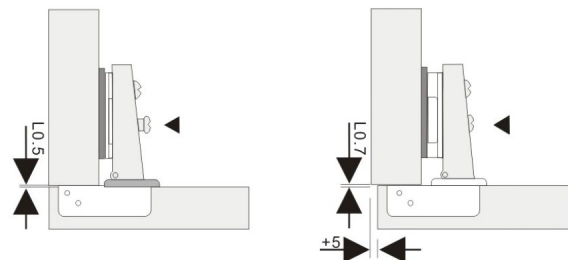

CONVENTIONAL DEPTH ADJUSTMENT 普通式深度调校


普通式深度调校

±2.5 mm



扭松铰链座上两枚已紧固的螺栓，铰链座上椭圆形螺栓孔可使铰链前后移动，可使门身向前移动2.5毫米。调校完毕，应重新紧固螺栓。


By loosening the two fastened screws in the hinge base, the hinge can be moved back or forth, so the door can be moved forward by 2.5 mm. After adjustment, remember to fasten the screws again.

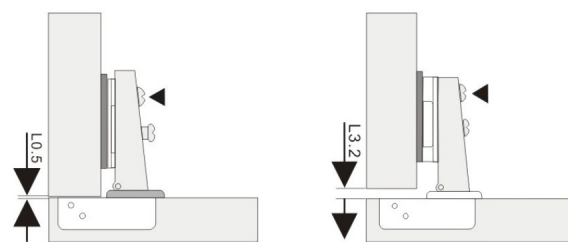

CONVENTIONAL UP / DOWN ADJUSTMENT 传统式上下调校


传统式上下调校

±1.5 mm




扭松两枚已紧固的螺栓，可使柜门上下移动1.5毫米，椭圆形螺栓孔可使铰链座向上、下两方移动。调校完毕，应重新紧固螺栓。

By loosening the two fastened screws in the hinge base, the door can be moved up or down by 1.5 mm. After adjustment, remember to fasten the screws again.

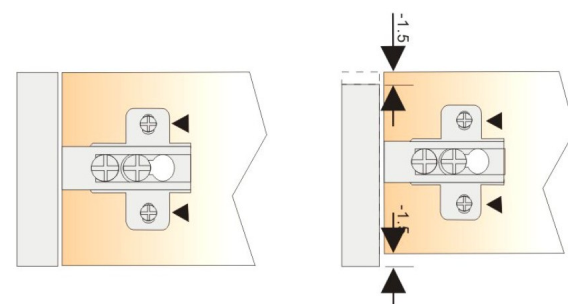

THREE-DIMENSIONAL ADJUSTMENT 三维调节

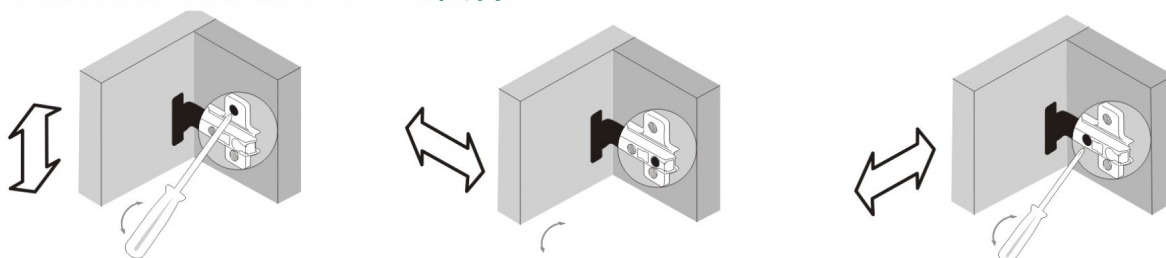

ADJUSTMENT PARAMETERS 铰链调节参数

CLASSIFICATION OF HINGES


铰链的分类

铰链的弯曲程度一般可以分为以下三种：

- 1. 直弯：**铰链臂是直的，与门或窗户呈90度夹角，开合角度相对较小，适用于开启角度较小的门或窗户，比如普通木门、铝合金门等。
- 2. 中弯：**铰链臂呈一定程度的曲线，开合角度比直弯铰链稍大，和门或窗户呈120度左右夹角，适用于移门、折叠门等。
- 3. 大弯：**铰链臂弯曲程度最大，和门或窗户呈135度角，开合角度相对较大，适用于部分淋浴房门或折叠窗户，可以在安装位置较为狭窄的场合下更好地适应角度。

The degree of bending of hinges can generally be divided into three types. **1.**

Straight bend (full cover): the hinge arm is straight, forming a 90° angle with the door; suitable for doors with small opening angles, e.g. ordinary wooden and aluminium alloy doors. **2. Mid bend (half cover):** the arm is slightly curved, forming about 120° with the door; suitable for sliding and folding doors. **3. Big bend (insert):** the arm has the highest degree of bending, forming 135° with the door; suitable for shower doors or folding windows and narrow installation positions.

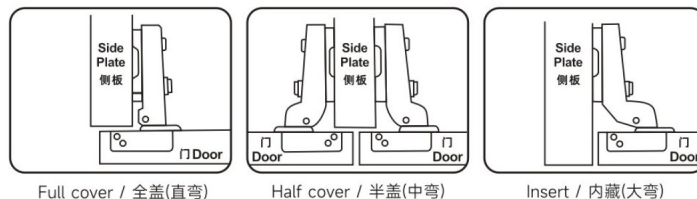


Full cover / 全盖(直弯)

Half cover / 半盖(中弯)

Insert / 内藏(大弯)

TYPE OF HINGE CUP

铰杯种类

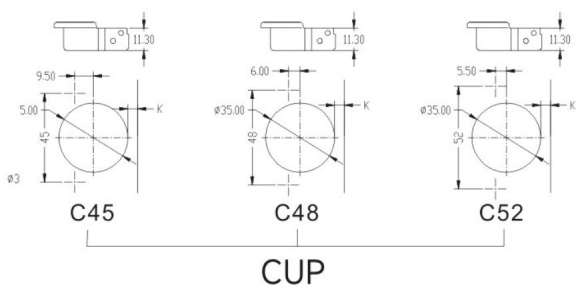


SCREW OF HINGE CUP

铰杯螺丝


配普通自攻螺丝
With self-tapping screw8MM胶头螺丝
with M8 dowel配10MM胶头螺丝
with M10 dowel配欧洲螺丝
With euro screw

HINGE BASE

铰链底座

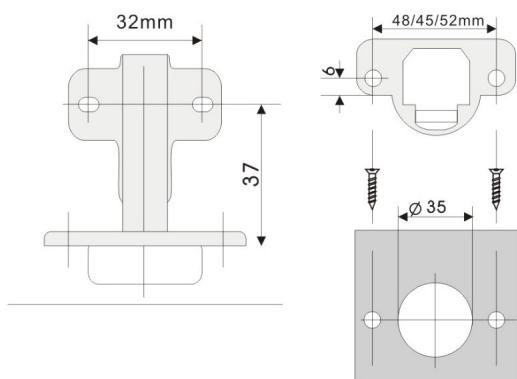配自攻螺丝
with self-tapping screw配欧洲螺丝
With euro screw配胶粒螺丝(8mm)
With dowel(8mm)配M10胶粒螺丝(10mm)
With dowel(10mm)

每扇门所需铰链数量(板材厚19-24MM)
Number of cup hinges per door
(with 18MM chipboard)

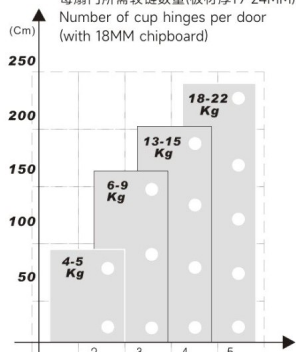Hinge buffer(choose)
BF01: Steel buffer(Finish:nickel)
BF02: Brass bufferHBK01(choose)
Steel cover for body

35MM CUP SS HYDRAULIC HINGE 不锈钢可泡水系列

Full cover / 全盖(直弯)



Half cover / 半盖(中弯)



Insert / 内藏(大弯)



Back / 背面






GC304 SUS 304 Hydraulic Hinge

GC2.0 Full SS 2.0 Hydraulic Hinge

GC1.5 Full SS 1.5 Hydraulic Hinge

GCN863 Half SS Hydraulic Hinge

Material / 材质	Stainless steel / 不锈钢
Angle of opening / 开启角度	95°-110°
Cup diameter / 杯直径	35mm
Depth / 深度	11.5mm
Hole pitch / 孔距	48mm
Door thickness / 门板厚度	14-20mm



35MM CUP 3D HYDRAULIC HINGE 三维调节铰链系列

Full cover / 全盖(直弯)



Half cover / 半盖(中弯)



Insert / 内藏(大弯)



Back / 背面

**GC826 3D04**

Iron 3D Hydraulic Nickel Hinge

**GC826 3D06**

Iron 3D Hydraulic Gun Black Hinge with 6 Holes





**GCM 3D14**

Iron 3D Hydraulic Hinge

**GC3D04**

SS or Iron 3D Hydraulic Hinge

Material / 材质	Stainless steel / Iron
Angle of opening / 开启角度	95°-110°
Cup diameter / 杯直径	35mm
Depth / 深度	11.5mm
Hole pitch / 孔距	48mm
Door thickness / 门板厚度	14-20mm



ALUMINUM FRAME HINGE 铝框铰链系列

Full cover / 全盖(直弯)



Half cover / 半盖(中弯)



Insert / 内藏(大弯)



Back / 背面

**AF826B**

Slide-on Aluminum Frame Black Hinge

**AF826G**

Slide-on Aluminum Frame Gold Hinge





**AF836N**

Slide-on Aluminum Frame Nickel Hinge

**AF826 3D06**

Aluminum Frame 3D Gun Black Hinge with 6 Holes

Material / 材质	Iron / 铁
Angle of opening / 开启角度	95°-110°
Cup diameter / 杯直径	35mm
Depth / 深度	11.5mm
Hole pitch / 孔距	48mm
Door thickness / 门板厚度	14-20mm



AMERICAN SHORT ARM HINGE 美式短臂系列

Full cover / 全盖(直弯)



Half cover / 半盖(中弯)



Insert / 内藏(大弯)



Back / 背面

**SA1H**

Stainless Steel Short Arm Hinge with Normal Screw

**SA2**

Stainless Steel Short Arm Hinge with 2D Screw





**SA1H**

Iron Short Arm Hinge with Normal Screw

**SA2**

Iron Short Arm Hinge with 2D Screw

Material / 材质	Stainless steel / Iron
Angle of opening / 开启角度	95°-110°
Cup diameter / 杯直径	35mm
Depth / 深度	11.5mm
Hole pitch / 孔距	48mm
Door thickness / 门板厚度	14-20mm



35MM CUP HINGE WITH HOOK 35杯铰链带钩系列

Full cover / 全盖(直弯)



Half cover / 半盖(中弯)



Insert / 内藏(大弯)



Back / 背面






AF261 Iron Normal Hinge with Hook

AF6264 Iron Hydraulic Hinge with Hook

AF3D Iron Hydraulic 3D Hinge with Hook

AFSS SS Hydraulic Hinge with Hook

Material / 材质	Stainless steel / Iron
Angle of opening / 开启角度	95°-110°
Cup diameter / 杯直径	35mm
Depth / 深度	11.5mm
Hole pitch / 孔距	48mm
Door thickness / 门板厚度	14-20mm



SPECIAL ANGLE HINGE 特殊角度铰链



Full cover / 全盖(直弯)



Half cover / 半盖(中弯)



Insert / 内藏(大弯)

165° Hinge / 165° 铰链



135°hinge / 135°铰链



90°hinge / 90°铰链



45°hinge / 45°铰链



30°hinge / 30°铰链



-30°hinge / -30°铰链



-45°hinge / -45°铰链



45° 3Dhinge / 45° 3D铰链







90° 3Dhinge / 90° 3D铰链



165° 3Dhinge / 165° 3D铰链

Material / 材质	Stainless steel / 不锈钢
Angle of opening / 开启角度	95°-110°
Cup diameter / 杯直径	35mm
Depth / 深度	11.5mm
Hole pitch / 孔距	48mm
Door thickness / 门板厚度	14-20mm



SPECIAL ANGLE ALUMINUM FRAME HINGE 特殊角度铝框铰链



Expand / 展开



Close / 合起



Back / 背面

165° Aluminum Frame Hinge / 165°铝框铰链



135°hinge / 135°铰链



90°hinge / 90°铰链



45°hinge / 45°铰链



30°hinge / 30°铰链



-30°hinge / -30°铰链



-45°hinge / -45°铰链



3-inch regular model / 3寸普通款



4-inch regular model / 4寸普通款



4-inch hydraulic version / 4寸液压款

Frog Hinge / 青蛙铰链

35MM CUP NORMAL IRON HINGE 常规铁铰链

Full cover / 全盖(直弯)





Half cover / 半盖(中弯)

Insert / 内藏(大弯)

Back / 背面

**F261** Slide-on Iron Hydraulic Hinge**F263** Slide-on Iron Hydraulic Hinge**261** Slide-on Iron Normal Hinge**A8** Slide-on Iron Normal Hinge

Material / 材质	Iron / 铁
Angle of opening / 开启角度	95°-110°
Cup diameter / 杯直径	35mm
Depth / 深度	11.5mm
Hole pitch / 孔距	48mm
Door thickness / 门板厚度	14-20mm



26MM CUP NORMAL HINGE 26杯普通铰链

Full cover / 全盖(直弯)



Half cover / 半盖(中弯)



Insert / 内藏(大弯)



Back / 背面

**2602** Small Iron Normal Hinge**2604** Small Iron Normal Hinge**26SA** Small Iron Short Arm Hinge

Front / 正面



Back / 背面






Front / 正面



Back / 背面

26G Small Iron Hydraulic / Normal Glass Door Hinge

Material / 材质	Iron / 铁
Angle of opening / 开启角度	95°-110°
Cup diameter / 杯直径	35mm
Depth / 深度	11.5mm
Hole pitch / 孔距	48mm
Door thickness / 门板厚度	14-20mm



40MM CUP HYDRAULIC HINGE 40杯液压铰链系列

Full cover / 全盖(直弯)



Half cover / 半盖(中弯)



Insert / 内藏(大弯)



Back / 背面






GC403D Iron 3D Hydraulic Hinge

GC404 Iron Hydraulic Hinge

GC403 Iron Hydraulic Hinge

GC401 Slide-on Iron Hydraulic Hinge

Material / 材质	Stainless steel / Iron
Angle of opening / 开启角度	95°-110°
Cup diameter / 杯直径	35mm
Depth / 深度	11.5mm
Hole pitch / 孔距	48mm
Door thickness / 门板厚度	14-20mm





02

SLIDE SERIES

滑轨系列

Iron Ball Bearing Slides 35 / 40 / 45mm	18-20
45mm Iron Soft Close Slide	21
Stainless Steel Slides	22-23
Undermount Soft Close Slides	24, 26
FGV 2-Fold Ball Powder Slide	25
Bidirectional Ball Slide	27
Heavy Duty Soft Close Slide	28
Slim Tandem Box	29-30



35MM IRON BALL BEARING SLIDE 35mm宽铁走珠滑轨

Material / 材质: Cold rolled steel 冷轧钢

Width / 宽度: 35mm

Length / 长度: 8"-18" (190-450mm)

Capacity / 承重: 20kg


Cycle / 开合: 50,000 times / 5万次

Salt spray test / 盐雾试验: 48H

Finish / 表面处理: Black 镀黑 / White 镀白 / Printing 印花

Installation / 安装方法: Side mount 侧面安装

Thickness / 材料厚度: ① ② ③ 0.5-0.8mm




高级钢珠
High Quality Steel Ball



耐高温/低温塑料
High Temperature/Low Temperature
Resistance Plastics

 black 镀黑
  white 镀白
  printing 印花

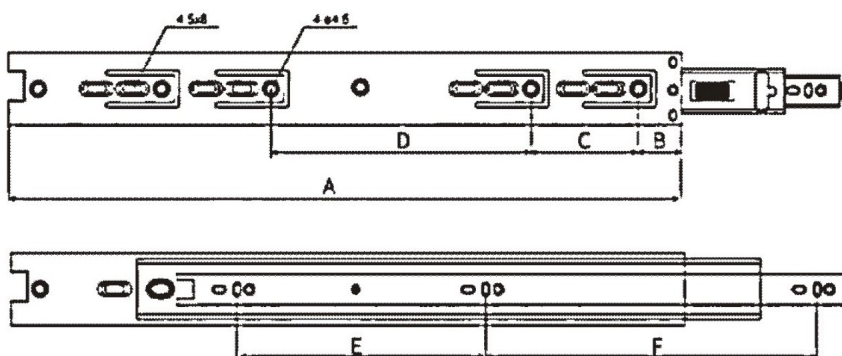

Unit / 单位: mm

SIZE	A	B	C	D	E	F
8寸 8"	190	35	96	-	-	128
10寸 10"	250	35	64	96	96	64
12寸 12"	300	35	64	64	128	96
14寸 14"	350	35	64	96	128	128
16寸 16"	400	35	64	160	160	160
18寸 18"	450	35	64	192	192	160

40MM IRON BALL BEARING SLIDE 40mm宽铁走珠滑轨

Material / 材质: Cold rolled steel 冷轧钢

Width / 宽度: 40mm

Length / 长度: 8"-18" (190-450mm)

Capacity / 承重: 20kg


Cycle / 开合: 50,000 times / 5万次

Salt spray test / 盐雾试验: 48H

Finish / 表面处理: Black 镀黑 / White 镀白

Installation / 安装方法: Side mount 侧面安装


Thickness / 材料厚度: ① ② ③ 0.5-0.8mm



高级钢珠
High Quality Steel Ball



耐高温/低温塑料
High Temperature/Low Temperature
Resistance Plastics

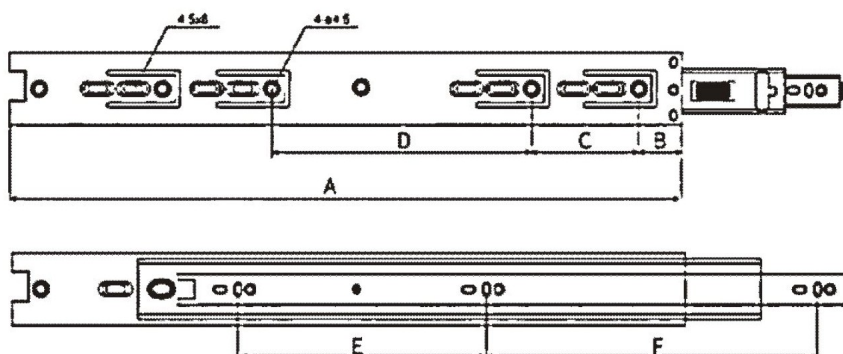

Unit / 单位: mm

SIZE	A	B	C	D	E	F
8寸 8"	190	35	96	-	-	128
10寸 10"	250	35	64	96	96	64
12寸 12"	300	35	64	64	128	96
14寸 14"	350	35	64	96	128	128
16寸 16"	400	35	64	160	160	160
18寸 18"	450	35	64	192	192	160

45MM IRON BALL BEARING SLIDE 45mm宽铁走珠滑轨

Material / 材质: Cold rolled steel 冷轧钢

Width / 宽度: 45mm

Length / 长度: 8"-24" (190-600mm)

Capacity / 承重: 30-45kg


Cycle / 开合: 50,000 times / 5万次

Salt spray test / 盐雾试验: 48H

Finish / 表面处理: Black 镀黑 / White 镀白

Installation / 安装方法: Side mount 侧面安装


Thickness / 材料厚度: ① ② ③ 0.7-0.9mm



高级钢珠
High Quality Steel Ball



耐高温/低温塑料
High Temperature/Low Temperature
Resistance Plastics

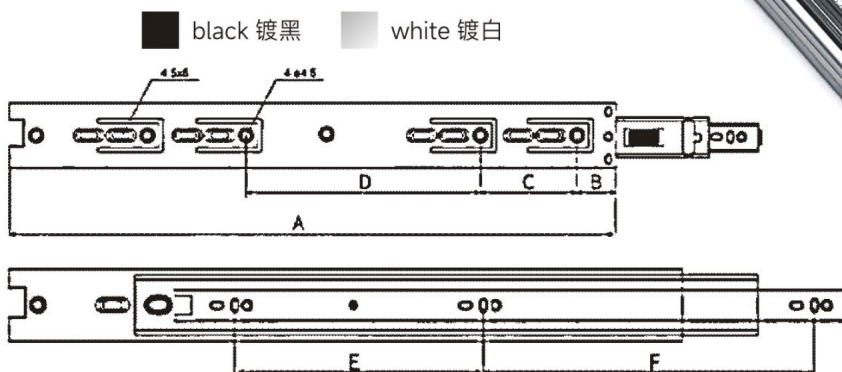

Unit / 单位: mm

SIZE	A	B	C	D	E	F
8寸 8"	190	35	96	-	-	128
10寸 10"	250	35	64	96	96	96
12寸 12"	300	35	64	128	128	96
14寸 14"	350	35	64	96	128	128
16寸 16"	400	35	64	160	192	128
18寸 18"	450	35	64	96	192	160
20寸 20"	500	35	64	128	224	192
22寸 22"	550	35	64	160	224	224
24寸 24"	600	35	64	160	256	256

45MM IRON SOFT CLOSE SLIDE 45mm宽缓冲滑轨

Material / 材质: Cold rolled steel 冷轧钢

Width / 宽度: 45mm

Length / 长度: 8"-24" (190-600mm)

Capacity / 承重: 30-45kg



Cycle / 开合: 50,000 times / 5万次

Salt spray test / 盐雾试验: 48H

Finish / 表面处理: Black 镀黑 / White 镀白

Installation / 安装方法: Side mount 侧面安装

Thickness / 材料厚度: ① ② ③ 0.7-0.9mm

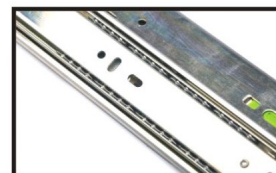

高级钢珠
High Quality Steel Ball



阻尼缓冲装置
Damping Soft-closing Device




black 镀黑 white 镀白

Unit / 单位: mm

SIZE	A	B	C	D	E	F
8寸 8"	190	35	96	-	-	128
10寸 10"	250	35	64	96	96	96
12寸 12"	300	35	64	128	128	96
14寸 14"	350	35	64	96	128	128
16寸 16"	400	35	64	160	192	128
18寸 18"	450	35	64	96	192	160
20寸 20"	500	35	64	128	224	192
22寸 22"	550	35	64	160	224	224
24寸 24"	600	35	64	160	256	256


STAINLESS STEEL BALL BEARING SLIDE 不锈钢普通滑轨

Material / 材质: **Stainless steel 不锈钢**Width / 宽度: **45mm**Length / 长度: **10"-24" (250-600mm)**Capacity / 承重: **20-45kg**Cycle / 开合: **50,000 times / 5万次**Salt spray test / 盐雾试验: **48H**Thickness / 材料厚度: ① ② ③ **0.9-1.0mm**

高级钢珠
High Quality Steel Ball




阻尼缓冲装置
Damping Soft-dosing Device

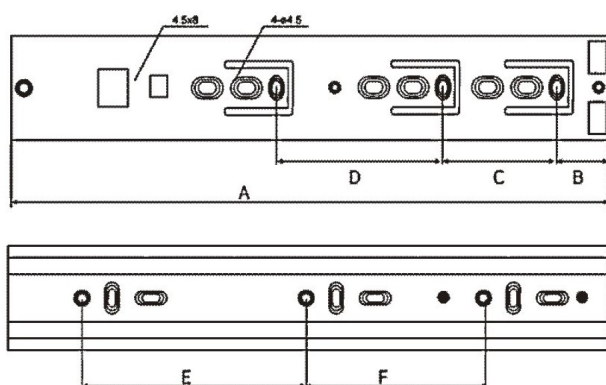

Unit / 单位: mm

SIZE	A	B	C	D	E	F
8寸 8"	200	35	96	-	-	128
10寸 10"	250	35	64	96	96	64
12寸 12"	300	35	64	128	128	96
14寸 14"	350	35	64	128	128	128
16寸 16"	400	35	64	160	192	128
18寸 18"	450	35	64	224	192	160
20寸 20"	500	35	64	128	224	192
22寸 22"	550	35	64	160	224	224
24寸 24"	600	35	64	192	256	256
26寸 26"	650	35	64	224	256	288


45MM STAINLESS STEEL SOFT CLOSE SLIDE 45mm不锈钢缓冲滑轨

Material / 材质: **Stainless steel 不锈钢**Width / 宽度: **45mm**Length / 长度: **10"-24" (250-600mm)**Capacity / 承重: **20-45kg**Cycle / 开合: **50,000 times / 5万次**Salt spray test / 盐雾试验: **48H**Thickness / 材料厚度: ① ② ③ **0.9-1.0mm**

高级钢珠
High Quality Steel Ball



阻尼缓冲装置
Damping Soft-closing Device

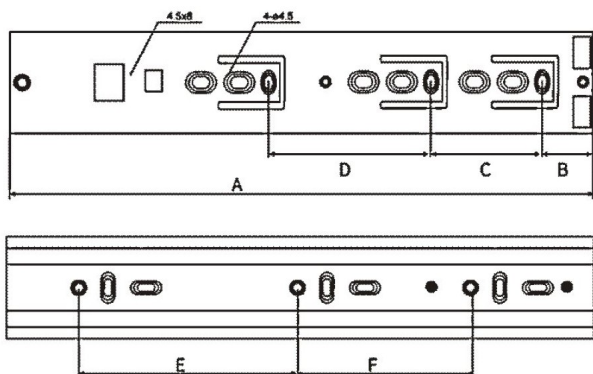

Unit / 单位: mm

SIZE	A	B	C	D	E	F
8寸 8"	200	35	96	-	-	128
10寸 10"	250	35	64	96	96	64
12寸 12"	300	35	64	128	128	96
14寸 14"	350	35	64	128	128	128
16寸 16"	400	35	64	160	192	128
18寸 18"	450	35	64	224	192	160
20寸 20"	500	35	64	128	224	192
22寸 22"	550	35	64	160	224	224
24寸 24"	600	35	64	192	256	256
26寸 26"	650	35	64	224	256	288

3-FOLD SOFT CLOSE UNDERMOUNT SLIDE 三节缓冲隐藏轨

Material / 材质: Cold rolled steel 冷轧钢

Length / 长度: 10"-24" (250-600mm)

Load capacity / 额定负重: 35kg

Installation / 安装方式: Under mount 底部安装

Cycle / 开合: 50,000 times / 5万次

Salt spray test / 盐雾试验: 48H

Finish / 表面处理: Zinc 镀锌




3D把手
3D handle



精密阻尼器
Precision damping pipe



镀锌板, 耐腐蚀
Galvanized, corrosion resistant

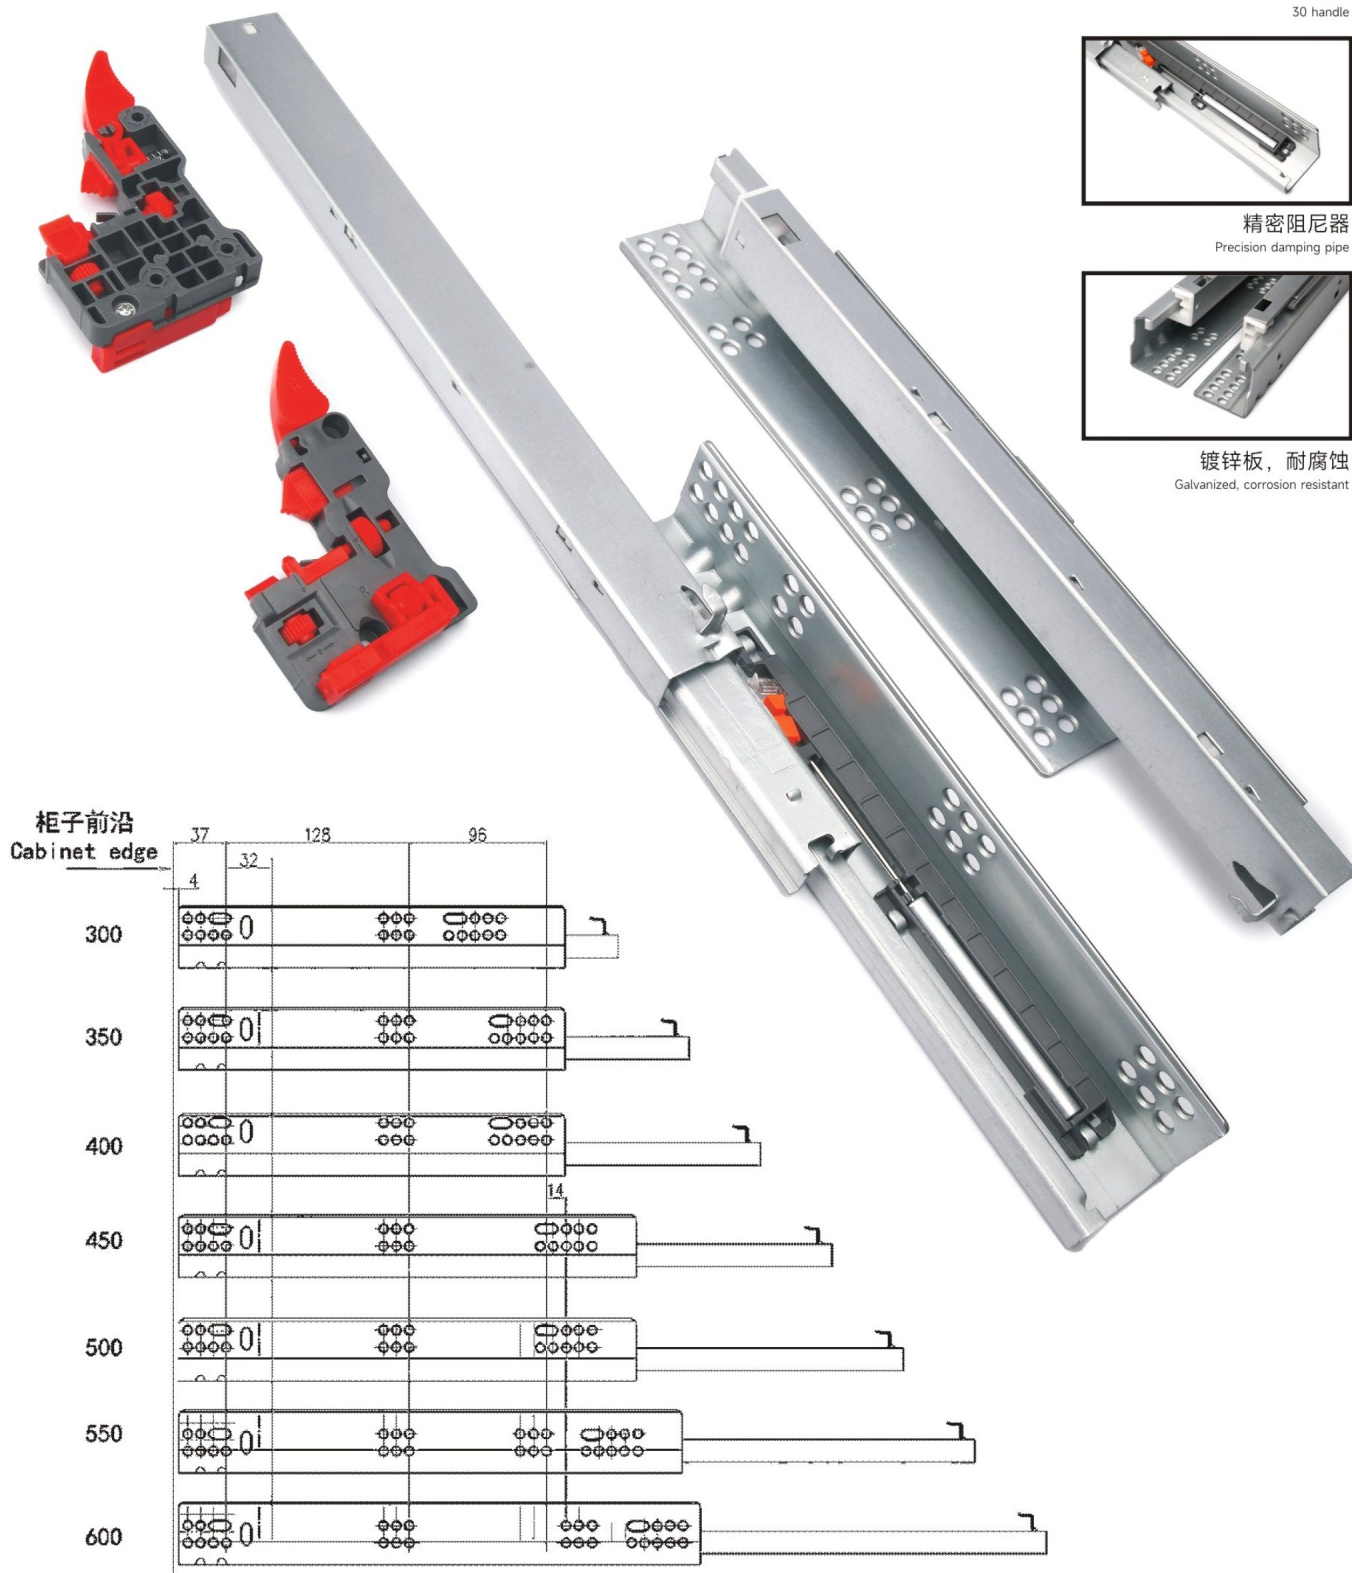

FGV 2-FOLD BALL POWDER SLIDE FGV两节喷粉滚轮滑轨

Material / 材质: Cold rolled steel 冷轧钢

Thickness / 材料厚度: 0.7 / 0.8 / 0.9 / 1.0 / 1.1mm


Length / 长度: 10"-18" (250-450mm)

Capacity / 承重: 10-25kg

Cycle / 开合: 50,000 times / 5万次

Finish / 表面处理: Black / White / Brown powder coated 黑色/白色/棕色喷漆

Installation / 安装方法: Side mount 侧面安装

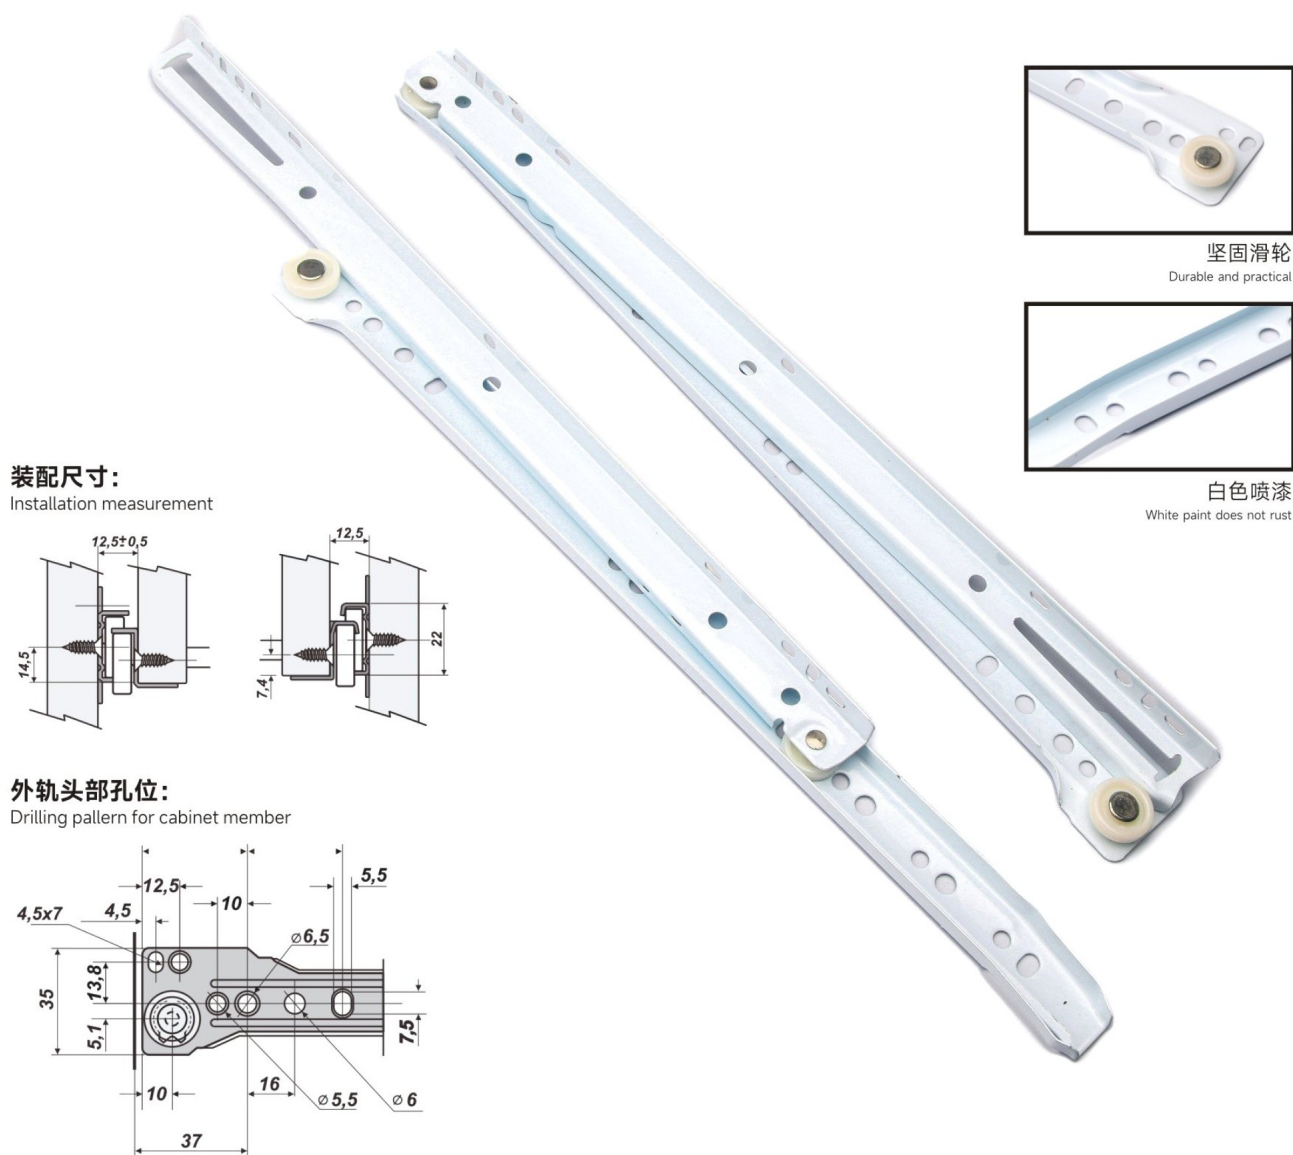

Unit / 单位: mm

SIZE	A	B	C	D	E	F	G
10寸 10"	300	65	129	194	96	224	297
12寸 12"	350	65	193	258	128	256	347
14寸 14"	400	65	225	290	160	320	397
16寸 16"	450	65	257	322	160	352	447
18寸 18"	500	65	321	388	192	416	497

2-FOLD SOFT CLOSE UNDERMOUNT SLIDE 二节缓冲隐藏轨

Material / 材质: Cold rolled steel 冷轧钢板

Length / 长度: 10"-24" (250-600mm)

Capacity / 承重: 35kg

Installation / 安装方式: Under mount 底部安装

Cycle / 开合: 50,000 times / 5万次

Salt spray test / 盐雾试验: 48H


Finish / 表面处理: Zinc 镀锌



精密阻尼器
Precision damping pipe



镀锌板, 耐腐蚀
Galvanized, corrosion resistant

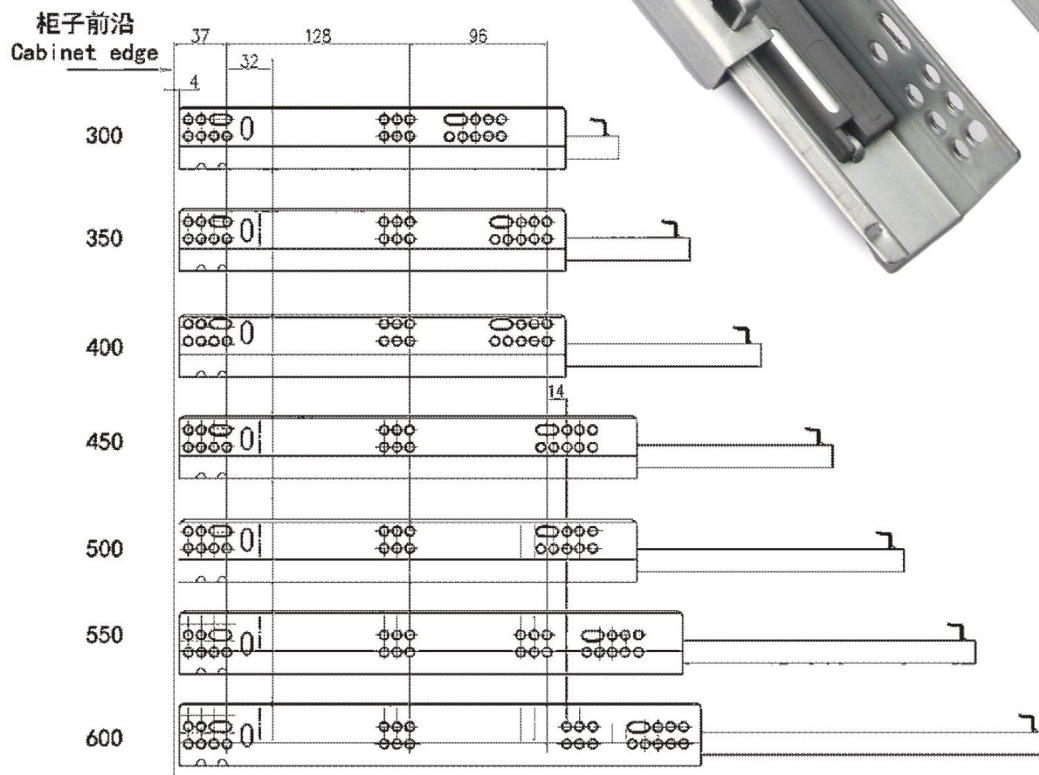

BIDIRECTIONAL BALL SLIDE 双向走珠滑轨

Material / 材质: Cold rolled steel 冷轧钢

Length / 长度: 8"-24" (182-438mm)

Capacity / 承重: 15kg



Installation / 安装方式: Under mount 底部安装

Cycle / 开合: 50,000 times / 5万次

Salt spray test / 盐雾试验: 48H

Finish / 表面处理: Blue zinc / Black 蓝锌/电泳黑处理

Thickness / 材料厚度: ① ② 0.8-1.0mm

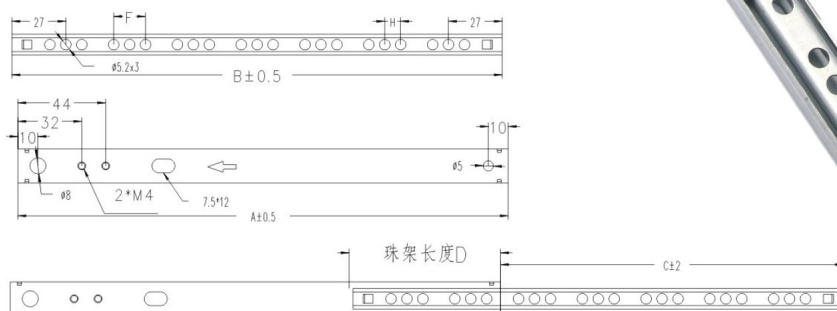消声钢珠
Muffled ball采用优良材料
Using high-quality materials

Unit / 单位: mm

SIZE	A	B	C	D	E	F	H
8寸 8"	182	182	127	54	32/44	5	80/90
10寸 10"	214	214	139	74	32/44	6	80/90
12寸 12"	246	246	171	74	32/44	7	80/90
14寸 14"	278	278	203	74	32/44	8	80/90
16寸 16"	310	310	213	96	32/44	9	80/90
18寸 18"	342	342	245	96	32/44	10	80/90
20寸 20"	374	374	277	96	32/44	11	80/90
22寸 22"	406	406	309	96	32/44	12	80/90
24寸 24"	438	438	341	96	32/44	13	80/90

53MM / 76MM HEAVY DUTY SOFT CLOSE SLIDE 53mm宽/76mm宽重型缓冲滑轨

Material / 材质: Cold rolled steel 冷轧钢板

Width / 宽度: 53mm / 76mm

Thickness / 材料厚度: 2.0 × 2.0 × 2.0mm



Capacity / 承重: 80kg (450mm as standard / 标准长度)

Cycle / 开合: 50,000 times / 5万次


Salt spray test / 盐雾试验: 48H

Finish / 表面处理: Zinc 镀锌

Installation / 安装方法: Side mount 侧面安装

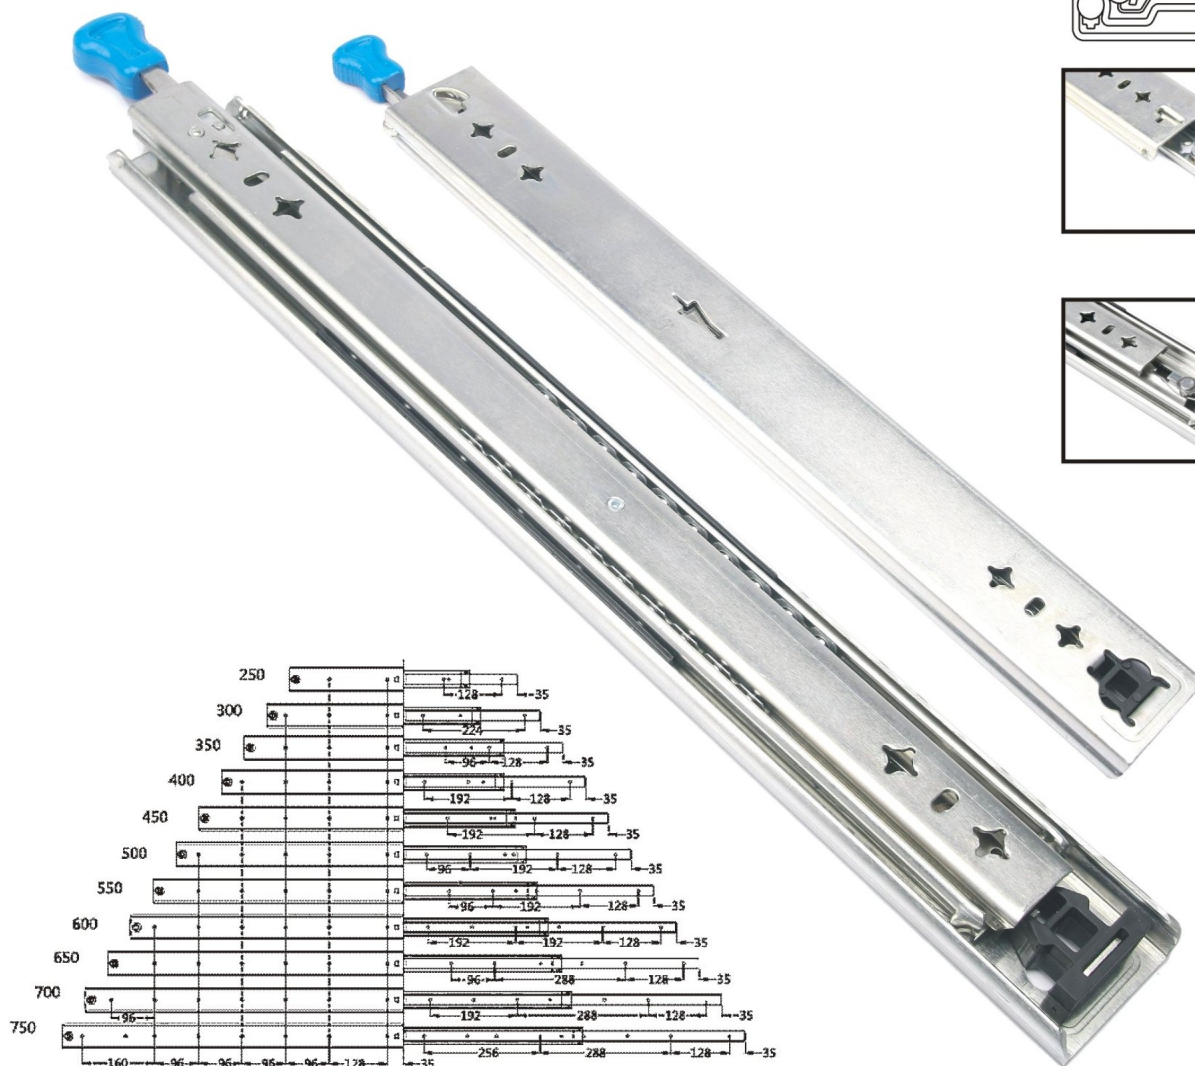带锁把手
Lock handle可拆卸扣
Removable clasp

SIZE	Series length 系列长度	Drawer length 抽屉长度	Min. cabinet depth 最小柜深
10寸 10"	250mm	250mm	254mm
12寸 12"	300mm	300mm	304mm
14寸 14"	350mm	350mm	354mm
16寸 16"	400mm	400mm	404mm
18寸 18"	450mm	450mm	454mm
20寸 20"	500mm	500mm	504mm
22寸 22"	550mm	550mm	554mm
24寸 24"	600mm	600mm	604mm
26寸 26"	650mm	650mm	654mm
28寸 28"	700mm	700mm	704mm
30寸 30"	750mm	750mm	754mm

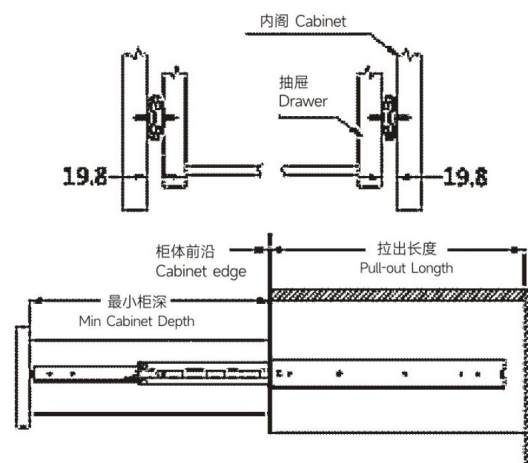

2-FOLD SOFT CLOSE SLIM TANDEM BOX 二节缓冲超薄骑马抽

Material / 材质: Cold rolled steel 冷轧钢

Length / 长度: 20" (500mm)


Load capacity / 额定负重: 35kg

Installation / 安装方式: Under mount 底部安装

Cycle / 开合: 50,000 times / 5万次

Salt spray test / 盐雾试验: 48H

Finish / 表面处理: Grey / 灰色

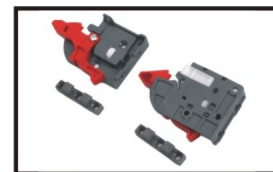


3D把手
3D handle



精密阻尼器
Precision damping pipe



镀锌板, 耐腐蚀
Galvanized, corrosion resistant

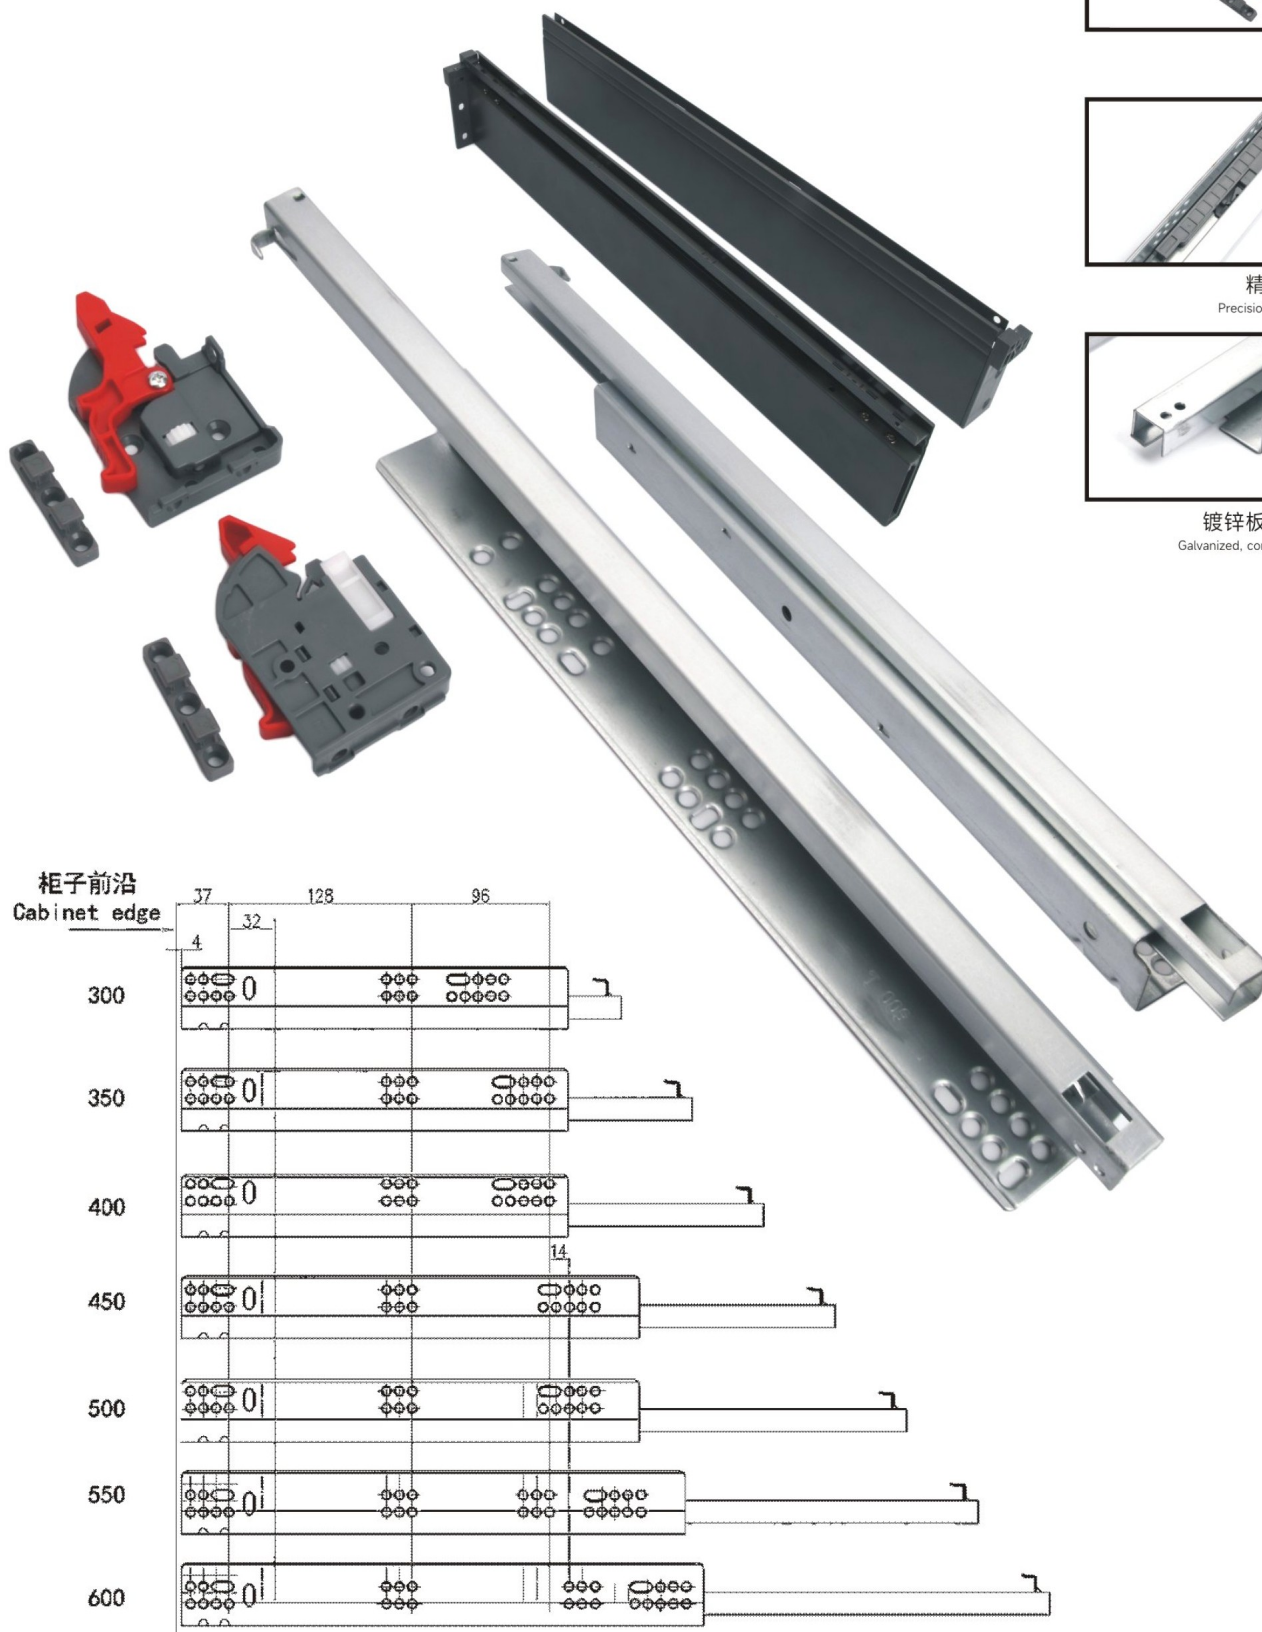

3-FOLD SOFT CLOSE SLIM TANDEM BOX 三节缓冲超薄骑马抽

Material / 材质: Cold rolled steel 冷轧钢

Length / 长度: 20" (500mm)

Load capacity / 额定负重: 35kg

Installation / 安装方式: Under mount 底部安装

Cycle / 开合: 50,000 times / 5万次

Salt spray test / 盐雾试验: 48H

Finish / 表面处理: Grey / 灰色




3D把手
3D handle




精密阻尼器
Precision damping pipe



镀锌板, 耐腐蚀
Galvanized, corrosion resistant

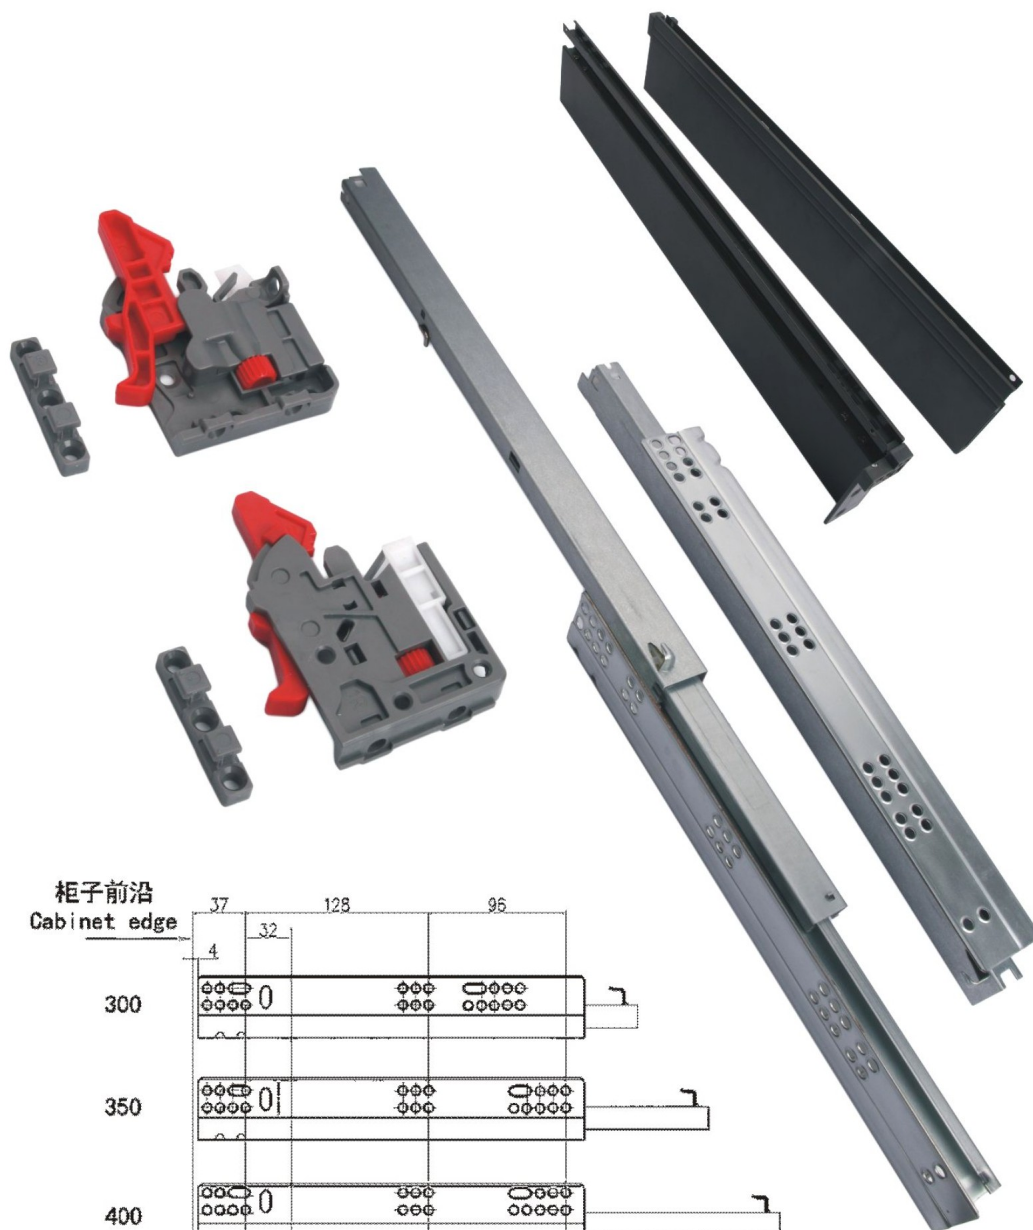

柜子前沿
Cabinet edge

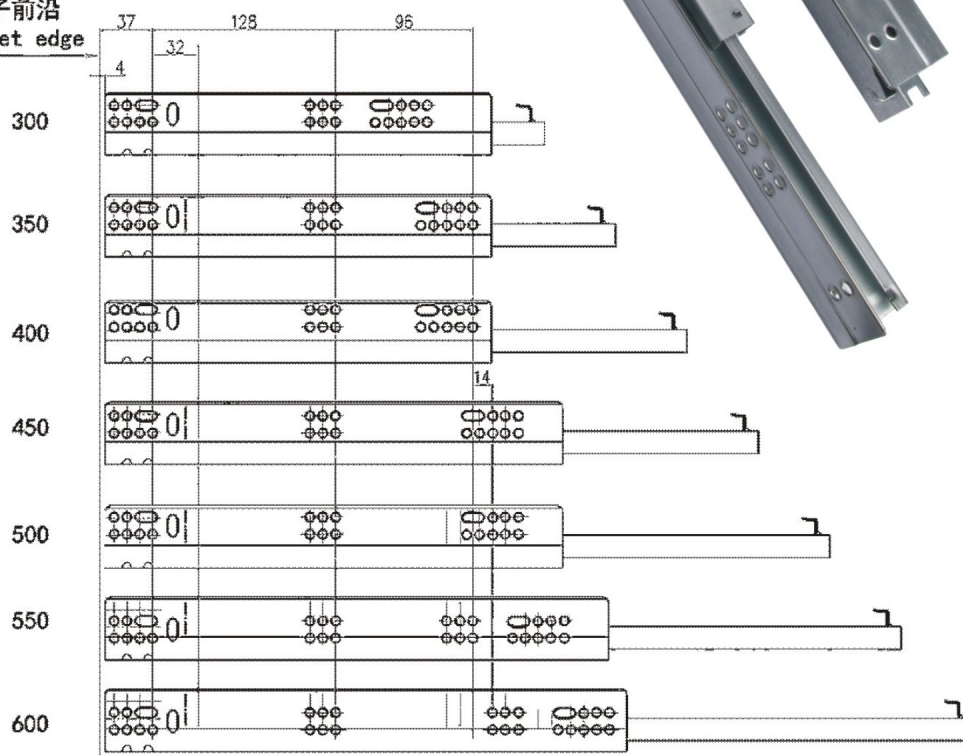




03

GAS SPRING


气动支撑系列

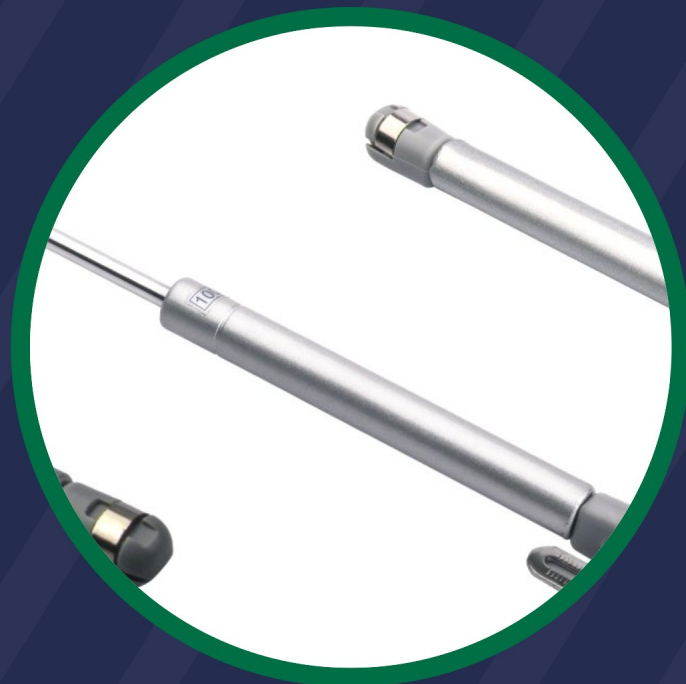

Technical Data / 技术参数	32
GC-01·GC-02	33
GC-03·GC-04	34
GC-05·GC-06	35



气撑也称为气弹簧或支撑杆，是一种用于橱柜五金配件的装置，具有支撑、缓冲、制动以及角度调节等功能。它采用液压油封设计，经久耐用。

A gas spring, also known as an air support or support rod, is a cabinet hardware device that provides support, buffering, braking and angle adjustment. Designed with hydraulic oil seals, it is durable and a universal tool in the kitchen.

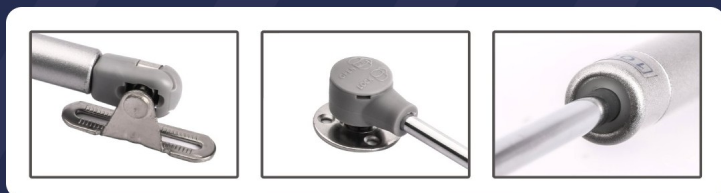

GAS SPRING — TECHNICAL DATA 技术参数

SUPPORT BEARINGCAPACITY · 支撑承载力说明图




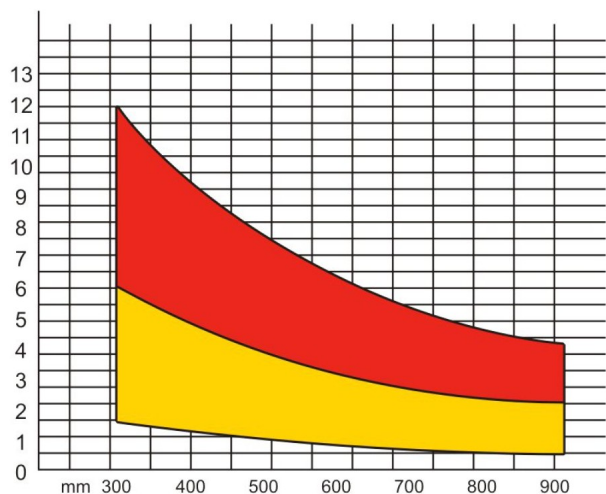


使用 1 只
Use 1 piece

使用 2 只
Use 2 pieces

管径: 15x1.00mm
Pipe diameter: 15x1.00mm

杆直径: $\Phi=6$ mm
Rod diameter: $\Phi=6$ mm



Product size 产品尺寸	Pipe length (mm) 管长	Stroke (mm) 行程	Center distance (mm) 中心距
6"	83	50	168
8"	88	55	178
10"	120	90	245
12"	137	107	280

LIFTING FORCE SELECTION REFERENCE TABLE · 举力选择参照表

Open angle 开门角度	80°				90°				100°			
Door height 门板高度 (mm)	300	400	500	600	300	400	500	600	300	400	500	600
80N	≤ 2.6	≤ 2.2	≤ 1.7	≤ 1.3	≤ 2.4	≤ 2.0	≤ 1.6	≤ 1.2	≤ 2.1	≤ 1.7	≤ 1.4	≤ 1.0
100N	≤ 3.3	≤ 2.7	≤ 2.2	≤ 1.6	≤ 3.0	≤ 2.5	≤ 2.0	≤ 1.5	≤ 2.6	≤ 2.2	≤ 1.7	≤ 1.3
120N	≤ 4	≤ 3.3	≤ 2.6	≤ 2.0	≤ 3.6	≤ 3.0	≤ 2.4	≤ 1.8	≤ 3.2	≤ 2.6	≤ 2.1	≤ 1.6

Values = maximum door weight (kg) · 门板重量 (kg)

注: 请按此表格选择合适的型号及门的重量, 达到最佳效果。

Note: please select the appropriate model according to door weight and height in this table to achieve the best results.

GAS SPRING 气动支撑系列



GC-01

主要材质: 铁, 塑料, 铜

Main material: iron, plastic, copper

颜色: 银色/黑色/白色

Color: silver / black / white

适用范围: 橱柜的木门/铝框门

Application: cabinet wooden doors / aluminium frame doors

处理工艺: 电镀, 喷漆

Treatment: electroplating, spray painting

长度: 6" 8" 10" 12"

Length: 6" 8" 10" 12"

支撑力: 50N - 250N


Force: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N

可根据客户需求定制: 气动向上支撑、液压向下支撑、任意角度支撑


Customizable: pneumatic upward, hydraulic downward or any-angle support

安装示例:

Installation example:



上翻 Up Lifting



下翻 Down Lifting



配件清单

Accessories list:



GC-02

主要材质: 铁, 塑料, 铜

Main material: iron, plastic, copper

颜色: 银色/黑色/白色

Color: silver / black / white

适用范围: 橱柜的木门/铝框门

Application: cabinet wooden doors / aluminium frame doors

处理工艺: 电镀, 喷漆

Treatment: electroplating, spray painting

长度: 6" 8" 10" 12"

Length: 6" 8" 10" 12"

支撑力: 50N - 250N


Force: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N

可根据客户需求定制: 气动向上支撑、液压向下支撑、任意角度支撑


Customizable: pneumatic upward, hydraulic downward or any-angle support

安装示例:

Installation example:



上翻 Up Lifting



下翻 Down Lifting



配件清单

Accessories list:



GAS SPRING 气动支撑系列



GC-03

主要材质：铁，塑料，铜

Main material: iron, plastic, copper

颜色：银色/黑色/白色

Color: silver / black / white

适用范围：橱柜的木门/铝框门

Application: cabinet wooden doors / aluminium frame doors

处理工艺：电镀，喷漆

Treatment: electroplating, spray painting

长度：6" 8" 10" 12"

Length: 6" 8" 10" 12"

支撑力：50N - 250N


Force: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N

可根据客户需求定制：气动向上支撑、液压向下支撑、任意角度支撑


Customizable: pneumatic upward, hydraulic downward or any-angle support

安装示例：

Installation example:



上翻 Up Lifting



下翻 Down Lifting



配件清单

Accessories list:



GC-04

主要材质：铁，塑料，铜

Main material: iron, plastic, copper

颜色：银色/黑色/白色

Color: silver / black / white

适用范围：橱柜的木门/铝框门

Application: cabinet wooden doors / aluminium frame doors

处理工艺：电镀，喷漆

Treatment: electroplating, spray painting

长度：6" 8" 10" 12"

Length: 6" 8" 10" 12"

支撑力：50N - 250N


Force: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N

可根据客户需求定制：气动向上支撑、液压向下支撑、任意角度支撑


Customizable: pneumatic upward, hydraulic downward or any-angle support

安装示例：

Installation example:



上翻 Up Lifting



下翻 Down Lifting



配件清单

Accessories list:



GAS SPRING 气动支撑系列



GC-05

主要材质：铁，塑料，铜

Main material: iron, plastic, copper

颜色：银色/黑色/白色

Color: silver / black / white

适用范围：橱柜的木门/铝框门

Application: cabinet wooden doors / aluminium frame doors

处理工艺：电镀，喷漆

Treatment: electroplating, spray painting

长度：6" 8" 10" 12"

Length: 6" 8" 10" 12"

支撑力：50N - 250N


Force: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N

可根据客户需求定制：气动向上支撑、液压向下支撑、任意角度支撑


Customizable: pneumatic upward, hydraulic downward or any-angle support

安装示例：

Installation example:



上翻 Up Lifting



下翻 Down Lifting



配件清单

Accessories list:



GC-06

主要材质：铁，塑料，铜

Main material: iron, plastic, copper

颜色：银色/黑色/白色

Color: silver / black / white

适用范围：橱柜的木门/铝框门

Application: cabinet wooden doors / aluminium frame doors

处理工艺：电镀，喷漆

Treatment: electroplating, spray painting

长度：6" 8" 10" 12"

Length: 6" 8" 10" 12"

支撑力：50N - 250N


Force: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N

可根据客户需求定制：气动向上支撑、液压向下支撑、任意角度支撑


Customizable: pneumatic upward, hydraulic downward or any-angle support

安装示例：

Installation example:



上翻 Up Lifting



下翻 Down Lifting



配件清单

Accessories list:



20+ INDUSTRY EXPERIENCE




15+ Manufacturing
Custom Experience



Professional R&D
Department



OEM / ODM
Customized Service

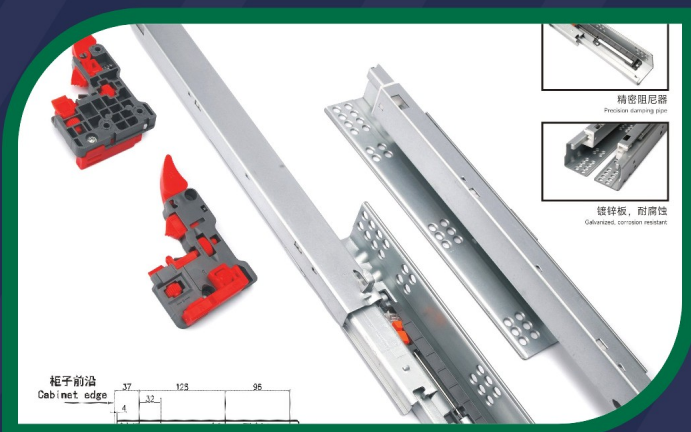


SARL : LAHKIRI & KAMOUCHE

+974 50 24 76 63
+213 654 76 80 42
+39 347 731 70 71
+213 553 31 76 18

contact@lk-hardware.com
www.lk-hardware.com



WhatsApp



WeChat